




TRADITION | QUALITY | TRUST

WWW.JEZIERSKI.COM.PL

PREMIUM

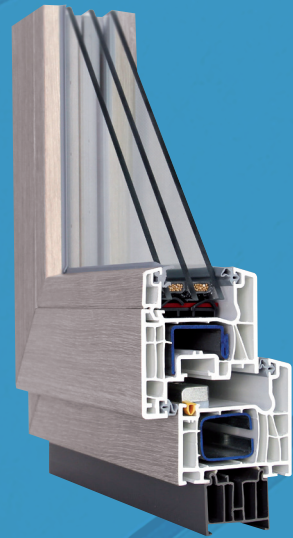

Frame depth **70 mm**

Sash depth **70 mm**

5-chamber

Warm frame SwisSpacer


2-level sealing system

Secustik handle -
protecting against burglary

Winkhaus ActivePilot
fittings - **4 hooks and anti-
theft valves** in each tilt-
pivoting sash graded tilt,
incorrect location lock of the
handle, lower hinge
with adjustable pressure,
micro-ventilation.

ULTRA PASSIVE

BESTSELLER!

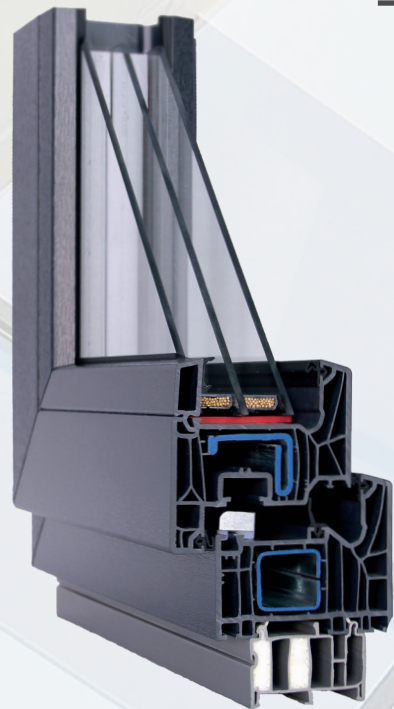

Ultra Passive is the best equipped window in the premium segment. It is not only the **warmest** window (up to 0,64 W/m²k for referenced window) but also is the **safest**. Anti-burglar corner equipped with a bayonet lock provides increased protection against burglary.

Ultra Passive is a **7-chamber** window, with a three level sealing system. This windows is specially designated for passiv houses - it meets the requirements of the German Institute for Window technology Lft Rosenheim in the passive construction area.

The new system apply the weldable EPDM seal as the first in the world. The weldable seals are deformation resistand and returns to the oryiginal shape in 85% in 15 years.



PHANTOM

NEW! 2021

Elegance and simplicity is a new quality for years!

On the best, **7-chamber profile**, we have designed a modern and elegant window that will fit into any interior.

Hidden hinges, a new type of corner welds, an elegant and certified Schuco handle, a nameplate is a standard of the new Phantom window.




Seams in
the new
V-type
technology

HIDDEN HINGES


- invisible when the window is closed;
- better insulation parameters heat - the hinges are completely tucked in a dry compartment between wing and frame;
- increased load capacity of the hardware up to 150 kg!



two
new colors
veneers



Schwarz Ulti-Matt




Woodec



Every detail matters - elegant
nameplate, top quality
Schuco handles, specially selected
colored seals and a warm frame

SCHÜCO EASYSLIDE

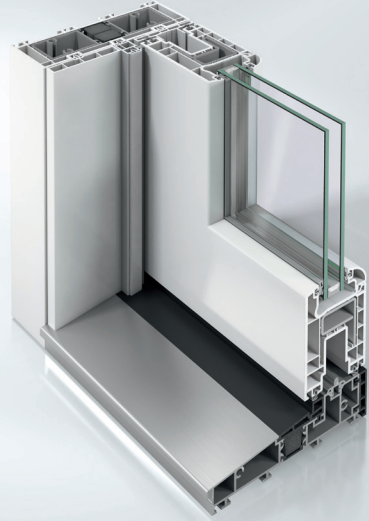

- thermally insulated frame and wings, 70 mm deep
- low value of the Uw coefficient $<1.3 \text{ W} / (\text{m}^2\text{K})$
- three-plane sealing ensure effective protection against cold, noise and rain
- complete security - also possible as anti-burglary in RC 2 class
- excellent functionality and ease of use also for sashes weighing more than 300 kg
- low threshold increases comfort and eliminates the risk of tripping
- special integrated thermal break with additional insulators prevents formation "thermal bridges"

DUOPORT SK-Z AUTOMAT



- comfortable duoPort SK tilt and slide door for large glazing, in line with the latest trends
- duoPort SK-Z is equipped with a special handle with steering, facilitating tilting, sliding and closing even very heavy sashes
- the basic version of the hardware is equipped with a solid one Mushroom-shaped locking bolts. By use of anti-burglary catches on the frame we can get burglary resistance to class RC2 / RC2 N
- the maximum door height is 2.7 m
- smooth and noiseless sliding and opening of the door with a maximum weight of 200 kg

WHY YOU SHOULD TRUST US?

- cooperation with the best component suppliers -Schüco and Winkhaus
- over 30 years of experience in the production of windows and doors made of PVC and aluminum
- millions satisfied customers all over Europe
- the highest standard fittings in each window
- we do not use recyclate, only a full-fledged product
- 7-year warranty
- comprehensive service - from quotation, measurement for assembly pre-made windows
- mobile site service
- panes from leading Polish ones manufacturers

SCHÜCO LIVINGSLIDE

NEW! 2021



The new LivingSlide sliding system is a slim design doors, seals and profiles in matching colors and maximum dimensions of the wings ensure optimal light access and comfort. Wings 82 mm deep, multi-chamber profiles, a thermally insulated threshold and innovative weldable EPDM seals provide the best protection against cold and condensation, even in the sensitive corner zone.

- one- and two-track components possible
- a threshold without architectural barriers facilitates passage
- glazing up to 52 mm thick
- special support for the bogie provides light weight handling - even heavy wings
- excellent thermal insulation - Uw coefficient to $0.8 \text{ W}/(\text{m}^2\text{K})$
- modern design thanks to flush elements
- large dimensions up to 6.5 m wide and 2.8 m high



We work with the best elements suppliers for the production of windows and doors in the industry: SCHÜCO, WINKHAUS, SAINT-GOBAIN GLASS, EFFECT GLASS, SWISSPACER, HOPPE.



SCHÜCO



Schüco Premium Partner is an associating program leading Polish producers of high quality Schüco joinery made of aluminum and PVC. We have a pleasure to belong to this group, assuring our customers the highest quality and functionality.

SCHÜCO
Premium Partner

✓ Standard ■ option — not available

	Phantom	Ultra Passive	Premium
Double locking bottom corner	—	✓	—
Warm SwisSpacer frame	✓	✓	✓
Window trims with a double seal	✓	✓	✓
Blockade of incorrect position of the handle*	✓	✓	✓
Multi-stage tilting of UR windows	✓	✓	✓
Standard number of mushrooms and anti-theft catches**	8	8	8
Anti-theft catches mounted to the reinforcements	✓	✓	✓
Hoppe Secustik handle with a rotation lock from the outside	✓	✓	✓
Tilt-turn fitting	✓	✓	✓
Two door handles on windows with a movable post	—	—	✓
Passive sashes in windows with a movable mullion are enveloped	✓	✓	✓
Low balcony threshold	■	■	■
Balcony latch with handrail	■	■	■
Concealed fittings	■	■	■
DB11 opening limiter	■	■	■
Sealing in V technology	✓	✓	✓
The brake is controlled by the FBP handle	■	■	■
Permissible leaf weight	100 kg	100 kg	100 kg
Steel reinforcement thickness (mm)	1,5-2,5	1,5-2,5	1,5-3,0
Guarantee	7 years	7 years	7 years
Leaf depth (mm)	82	82	70
Frame depth (mm)	82	82	70
Number of chambers in the wing	7	7	5
Number of chambers in the frame	7	7	5
Number of seals	3	3	2
Double-glazed unit Ug = 1.0	■	■	✓
Triple glazing Ug = 0.5	✓	✓	—
Declared performance for the reference window 1230x1480 mm			
Watertightness	9A	9A	9A
Wind load resistance	C3/B3	C3/B3	C3/B3
Air permeability	4	4	4
Thermal transmittance	To 0.64 W/m²k	To 0.64 W/m²k	To 0.80 W/m²k

* - for a window with a minimum height of 825mm

** - in window O34



JEZIERSKI MARKOWE OKNA

Lekomin 2, Zagnańsk k/Kielc 26-050
biuro@jezierski.com.pl, +48 41 317 46 00

www.jezierski.com.pl